
FS SERIES OUTDOOR STANDARD LED PRODUCTS

FS series outdoor stadium led solution
Model no.: Pitch 6.6mm, 8mm, 10mm

SMD high quality led display for outdoor sports application

Support front & rear maintenance
Easy and fast installation
High refresh rate & wide viewing angle soft silicon mask and pillow case designed for protecting athletes & audiences from injury.



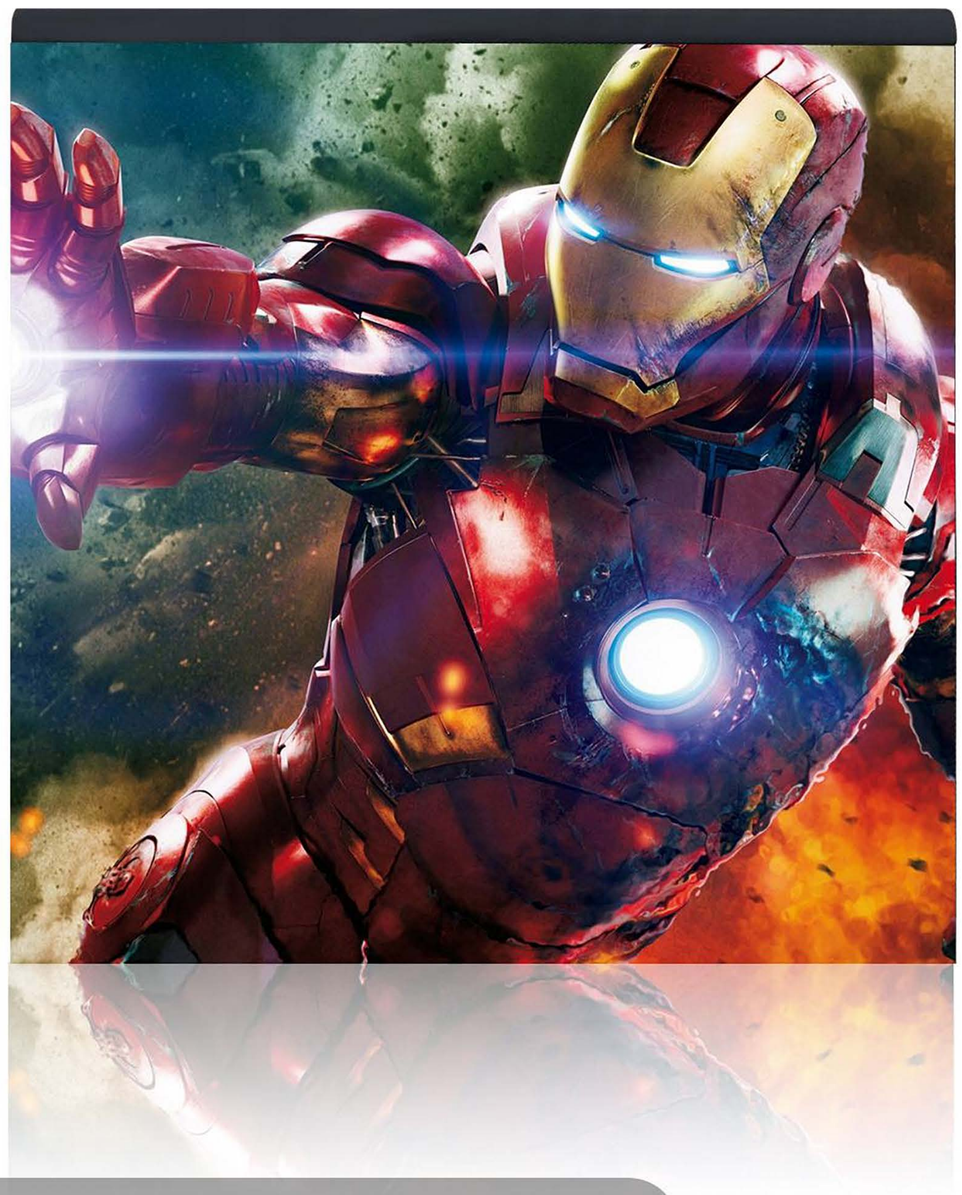

FEATURES

ENERGY SAVING

IP65 WATER PROOF

HIGH-CONTRAST

HIGH REFRESH RATE

HIGH BRIGHTNESS

INTELLIGENTMODULE

SEAMLESS PANEL DESIGN

FRONT AND REAR SERVICE


FS SPECIFICATIONS




Outdoor Perimeter Display			
Pixel Pitch	6.6mm	8mm	10mm
LED type	2727 SMD	3535 SMD	
Pixel config	1R1G1B		
Module size	320mm*320mm		
Module resolution	48*48	40*40	32*32
Pixel indensity(dots/m2)	22,500	15,625	10,000
Panel size	960mm*960mm		
Panel resolution	144*144	120*120	96*96
Panel material	die cast aluminum		
Maintenance	Front & Rear		
Brightness	5000 ~ 8000nit		
Protection level	IP65/IP54		
Refresh rate	1920HZ / 3840HZ		
Input voltage	AC: 110V~240V, 50~60Hz		
Viewing angle	140°/140°		
Gray scale	14bit		
Driving mode	Dynamic scan		
Operating environment	-20°C~60°C 5%~95%RH		
Max. Power	900 watts/panel		
Avg. power	270 watts/panel		
Control System	NOVASTAR / Colorlight / Linsn		

PRODUCT DESCRIPTION

01 Fast And Easy Maintenance

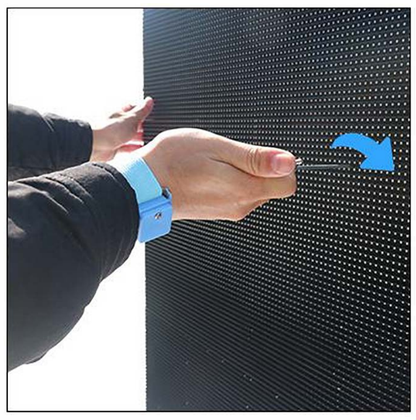


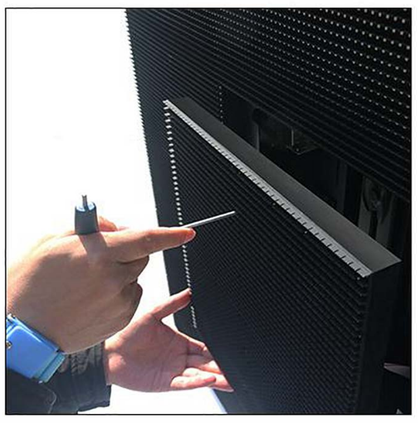




Step 1: Use "T" Wrench and insert one hole of the module then rotate "T"wrench in anti-clockwise direction to unlock.
Step 2: Repeat step 1 on the other hole to release the module separate from cabinet easily.
Step 3: Disconnect power & data cable.

02 Better Protection For Screen And Player

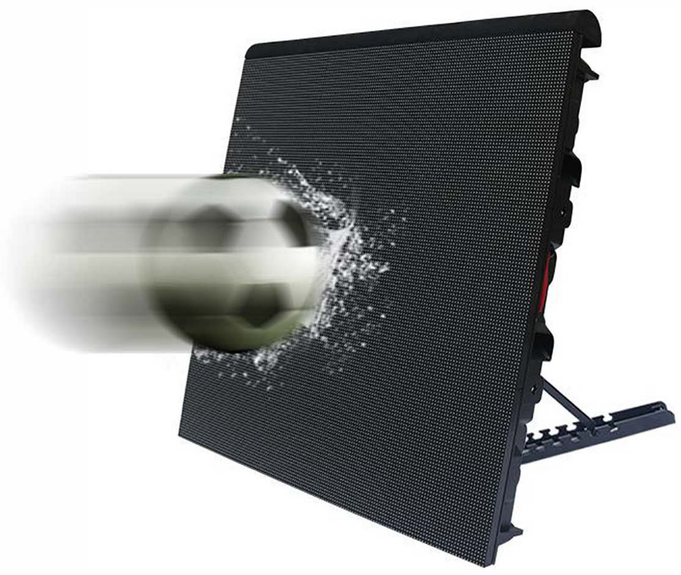

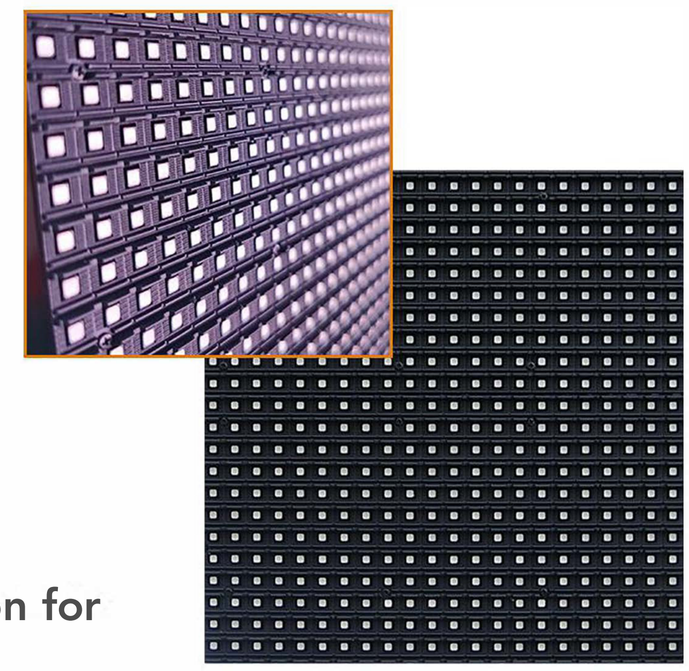


Optimal design of soft silicone mask and pillowcase make good protection for both screen and players who fell down on the screen somehow.

03 Stadium LED Display Cabinet Appearances




Top Protect Soft Rubber

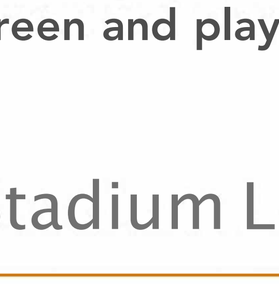

Emergency Gate

Adjustable Black

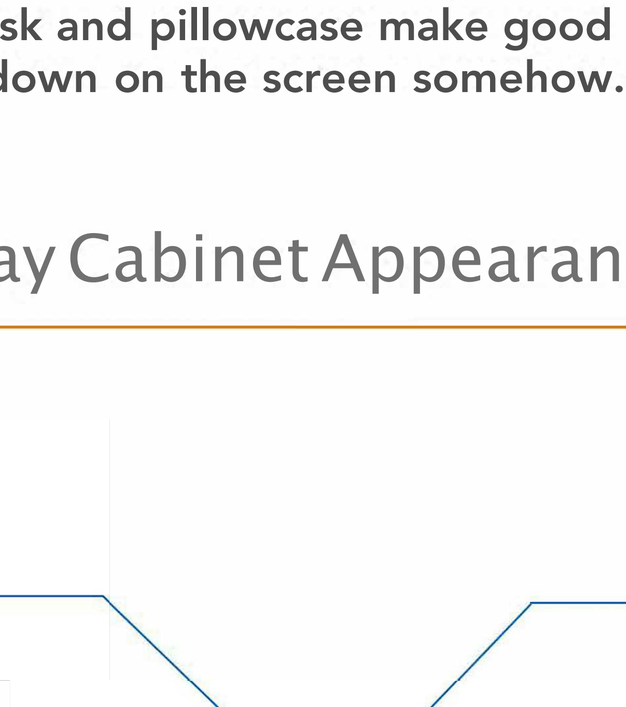



Aluminum Alloy Cabinet

Easy Locks One Hand Operation

Soft Silicone Mask